



Benefits

- ▶ 1U 17" 4K LCD console drawer
- ▶ Dual slide - LCD and keyboard slide independently
- ▶ 3840 x 2160 native resolution / 16.7M colors (8-bit)
- ▶ Display port 1.2 video input / USB KB / MS
- ▶ Built-in dual stereo speakers
- ▶ One Man installation design
- ▶ Enhanced aesthetics with molded front handle and two point lock
- ▶ 2-year standard warranty (upgradable up to 5 years)

Options

- HDMI 1.4 video input
- 3G / HD / SD-SDI Broadcast-grade input
- DC power : 12V / 24V / 48V / 125V
- MAC or SUN Micro keyboard options available

Product Specifications

Console Port

Video input	Display port 1.2
KB / MS	USB type B
DP console 6ft cable : CP-6	Drawer end : DP + USB type B (KB / MS) Server end : DP + USB type A

Video Option

Digital	HDMI	HDMI 1.4 / HDCP 1.4
---------	------	---------------------

LCD Panel

Panel size (diagonal)	17.3"
Native resolution	3840 x 2160
Brightness (cd/m ²)	400
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M, 8-bit
Viewing angle (L/R/U/D)	89/89/89/89
Response time (ms)	30
Dot pitch (mm)	0.0995
Display area (mm)	382.12H x 214.94V
Surface treatment	Anti-glare
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	20,000

Audio Option

Input	Connector	3.5mm stereo jack
	Impedance / Power level	30kΩ / 750mV
Output	Connector	3.5mm stereo jack
	Resistance / Power level	30kΩ / 2.8V
Speaker	Dual stereo	2W x 2

Power

Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 29W / Max. 38W
	Power saving mode	Max. 9W / Max. 18W
	Power button on	Max. 2W / Nil

Physical

Product (W x D x H)	Single console	442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch
	Console w/ KVM	442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch
Packing (W x D x H)	Single console /	595 x 860 x 140 mm
	Console w/ KVM	23.4 x 33.9 x 5.5 inch
Net weight	Single console	12 kg / 26.4 lb
	Console w/ KVM	13 kg / 28.6 lb
Gross weight	Single console	18 kg / 39.6 lb
	Console w/ KVM	19 kg / 41.8 lb

Environment

Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	20~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Mounting Distance

Single console drawer / Console w/ KVM drawer	660 ~ 870 mm 26 ~ 34.3 inch
---	--------------------------------

Compliance

EMC	FCC & CE certified
Safety	CE / LVD certified
Environment	RoHS2 & REACH compliant

DK117 models w/ KVM

** **IP** console upgrade option for resolution support 1920 x 1080

DP KVM	IP	Remote	12-port
	1	0	K117 - IP1202P
	0	1	K117 - 1202P
	0	0	K117 - 1201P

DP USB KVM Cable

Resolution 16:10 - max. 1920 x 1200
 Support : 16:9 - max. 3840 x 2160
 4:3 - max. 1600 x 1200





CP - 6 (6 ft)

** Resolution related to LCD specification

Standard Keyboard

Ge G keyboard integrated with touchpad

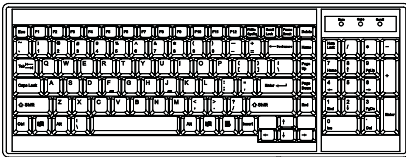

Supporting layouts

Region	Country	Country	Country	Country	Country
America					
	United States				
EMEA					
	United Kingdom	Germany	France	Spain	Norway
	Italy	Russia	Switzerland	Netherlands	Portugal
Asia	China	Japan	Korea	Arabia	Turkey

Keyboard Options

* US layout only

Me Mac keyboard with touchpad



Se S keyboard with touchpad

